

AE-DN2223-C2 1080P HD Dashboard Camera



Key Features

- 1 1080P full HD main camera, wide field angle up to 140° (diagonal)
- 1 TVI/CVBS second camera optional (IR and water-proof optional)
- Support built-in MIC and speaker for audio in and out
- GPS module optional and longitude ,latitude and speed overlay on picture
- 4G module optional; Built-in WIFI module and WIFI AP function supported
- Built-in G-Sensor module, support video recording linkage at car crash or strong vibration (Linkage video record can be configured be no-overwritten)
- TF card for video recording, up to 128GB (Overwriting supported)
- MP4 recoding format , playback via universal player
- 2.4 inch screen for live view and record playback
- Bluetooth control optional, support one key picture capturing(video recording linkage supported) and one key mute configuration of video recording
- Support RS232 and I/O port extensional for other peripherals
- Easy installation and user friendly, plug and play (Automatically recording after power on)
- Low power consumption and high performance




Specifications

Dashboard Recorder	
Image Sensor	1/3" Progressive Scan CMOS
Camera Resolution(Main)	1080P(1920*1080)
Second Camera	720P@25/30fps,VGA@30fps (IR and water-proof optional)
View Angle	140°(diagonal), 120°(horizontal)
Recording Resolution	1080P@30fps, 720P@30fps (720P default),
Video Compression	H.264
Picture Format	JPEG (Picture quality can be configured)
OSD Overlay	Date, time, GPS(longitude and latitude), speed
Screen	2.4 inch, resolution: 320*240
Storage	1 TF card, up to 128GB
Communication module	WIFI,4G(Optional)
Sensor	Built-in G-sensor, GPS(optional)
Interfaces	
Video Output	TV-OUT,HDMI
USB Port	1 USB2.0
Serial Port	1 RS232
IO Port	1 IO input, 1IO output
Audio	Built-in MIC and speaker
General	
Working Temperature/Humidity	-20°C to 60°C (-4°F to 140°F), Humidity 95% or less (non-condensing)
Power Supply	5VDC 2A
Power Consumption	MAX. 6W
Dimension	100mm×59mm×19.3mm (3.94"×2.32"×0.76")
Weight	Approx. 110g (0.242lb)

Order Models

AE-DN2223-C2

Dimensions

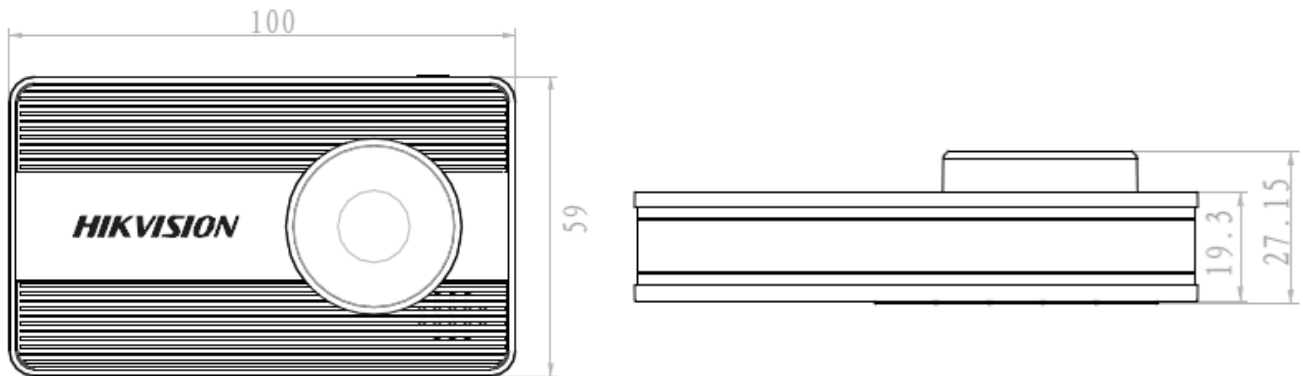

Accessories



Bracket



Charger



USB Cable

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com