


# UTP7201GE-PSE60

## PoE Injector

This is a single-port PoE injector with one Ethernet port, one PoE output port and one AC input power port. It supports end-span PoE with an output power consumption of up to 60W. It features:10/100M/1000Mbps network,100m transmission distance,6KV lightning protection, industrial-level chip and patent alert. It's an excellent choice for power supply and network transmission on PTZ cameras, all-in-one PCs and digital display system.

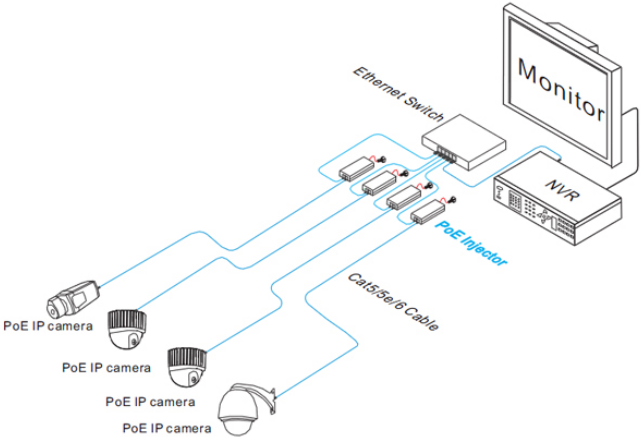

### NEON-POE60 SPECIFICATIONS

Item		Description
Interface	Input Voltage	AC100V~AC240V
	Data Input	1×RJ45
	PoE output	1×RJ45
PoE	PoE Power Supply Type	End-span/Mid-span
	PoE Power Output	DC 54V/60 watts
	Output Ripple	< 5%
	Power Pin Assignment	Pair1:1/2(+),3/6(-) Pair2:4/5(-),7/8(+)
Ethernet Port	Communication Port	1×RJ45 Input
	TransmissionRate	10/100/1000Mbps
	Transmission Medium	Cat5/5e/6 Cable
	Distance	100m (Max.)
Status	Power LED	1 (Red)
	PoE LED	1 (Orange)
Protection	Surge Protection	PoE Power : 1KV(Differential Mode),2KV(Common Mode)1.2/50us , 8/20us
		Ethernet : 2KV(Differential Mode),6KV(Common Mode)10/7000us
		1a Contact Discharge Level 3
		1b Air Discharge Level 3
	ESD	Per: IEC61000-4-2
Environment	Working Temperature	-10℃~55℃
	Storage Temperature	-40℃~85℃
	Humidity(Non-condensing)	0~90%
Mechanics	Dimension(LxWxH)	160mm×64mm×60mm
	Material	ABS Plastics
	Color	Black
	Weight	200g

