

## DS-D5B86RB/A Interactive Tablet



The Interactive tablet (hereafter referred to as the “device”) integrates functions of computers, projectors, interactive whiteboards, sound boxes, cameras (optional), bluetooth remote control (optional), HDTVs, advertising machines and so on. The device integrates technologies like 4K display, infrared touch, human-machine interaction, multi-media information processing, and network transmission and provides users with various features such as writing, annotating, multi-screen sharing, pen detection and remote video call (optional). The Interactive tablet is mainly used for remote video conferences, trainings and guidance, medical consulting, and other events in kinds of offices, meeting rooms, multi-media classrooms, exhibition halls and so on.

- Ultra HD display with up to 3840 × 2160 resolution of input signal available.
- 20px ultra fine writing, and 2 mm diameter recognizable with the precision of 1 mm.
- Built-in Wi-Fi realizes miracasting without any cable connection.
- Built-in interactive whiteboard system allows annotating and sharing by QR code.
- Looping-out display available.
- Various audio and video interfaces for device access.
- Built-in network switch chip saves a network switch.
- Built-in Android system provides kinds of applications.
- Compatible with OPS/OPS-C devices, realizing smooth switch between built-in systems.
- Ultra-thin design with aluminum profile frame.




## ▪ Specification

Model		DS-D5B86RB/A
<b>Product Model</b>	Product Model	DS-D5B86RB/A
<b>Display</b>	Screen Size	86 inch LED Backlight
	Backlight	DLED
	Pixel Pitch	0.164(H) × 0.493(V) mm
	Resolution	3840 × 2160 @60 Hz
	Brightness	350 cd/m <sup>2</sup>
	Color Depth	10 bit
	Contrast Ratio	1200: 1 (Typ.)
	Response Time	6 ms
	Color Gamut	90% NTSC (CIE1931) (Typ.)
	Refresh Rate	60 Hz
	Viewing Angle	178°(H)/178°(V)
<b>Built-in System</b>	Operation System	Android 8.0
	Processor	4-core A73 × 2 + A53 × 2, 1.5 GHz
	Memory	3 GB
	Built-in Storage	32 GB
	NIC	Built-in 100 Mbps NIC, supporting routing
<b>Touch</b>	Type	Infrared touch screen
	Glass	AG smooth glass
	Touch Point	20 point multi-touch
	Touch Response Time	< 10 ms
	Touch Precision	±1 mm (≥ 90% touching area)
	Touch Craft	Full paste
<b>Internal Function</b>	Loudspeaker	Built-in 2 × 16 W loudspeaker
	Bluetooth	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version.
<b>Interface</b>	Video & Audio Input	HDMI IN × 2, MAX 4 K @ 60 Hz, LINE IN × 1
	Video & audio output	HDMI OUT × 1, MAX 4K @ 60 Hz; LINE OUT × 1
	Control interface	RS-232 × 1
	Network Interface	RJ45 (100Mbps ports) × 2
	Data	2 USB on front panel , 2 USB on rear panel

	Transmission Interface	
Power	Power Consumption	< 420 W (full load)
	Standby Consumption	0.5 W
Working Environment	Working Temperature	0 °C~40 °C
	Working Humidity	10%~90% RH
General	Power	AC 100 V~240 V, 50/60 Hz
	Product dimensions	1963× 1159 × 87.5 mm
	Package Dimensions (W × H × D)	2187 x 1366 x 274mm
	Net Weight	65.12 kg
	Gross Weight	86.24 kg


## ▪ Available Model


## ▪ Physical Interface

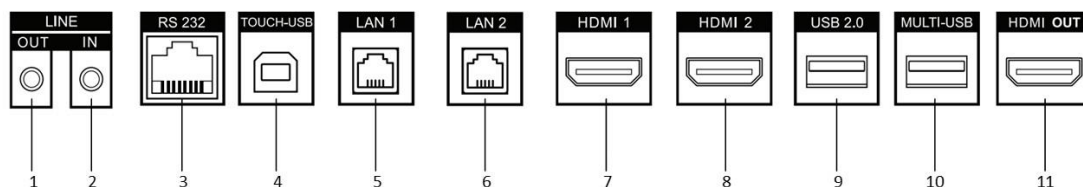


接口	说明	接口	说明
1.LINE OUT	Earphone Interface	2.LINE IN	Audio Input Interface
3.RS-232	RS-232 Serial Port	4.TOUCH-USB	Peripheral Touch Interface
5.LAN 1	Ethernet Interface 1	6. LAN 2	Ethernet Interface 2
7.HDMI 1	HDMI1 Input Interface	8.HDMI 2	HDMI2 Input Interface
9.USB 2.0	USB 2.0 Interface	10.MULTI-USB	Multi-function USB Interface
11.HDMI OUT	HDMI Output Interface		

## ▪ Installation

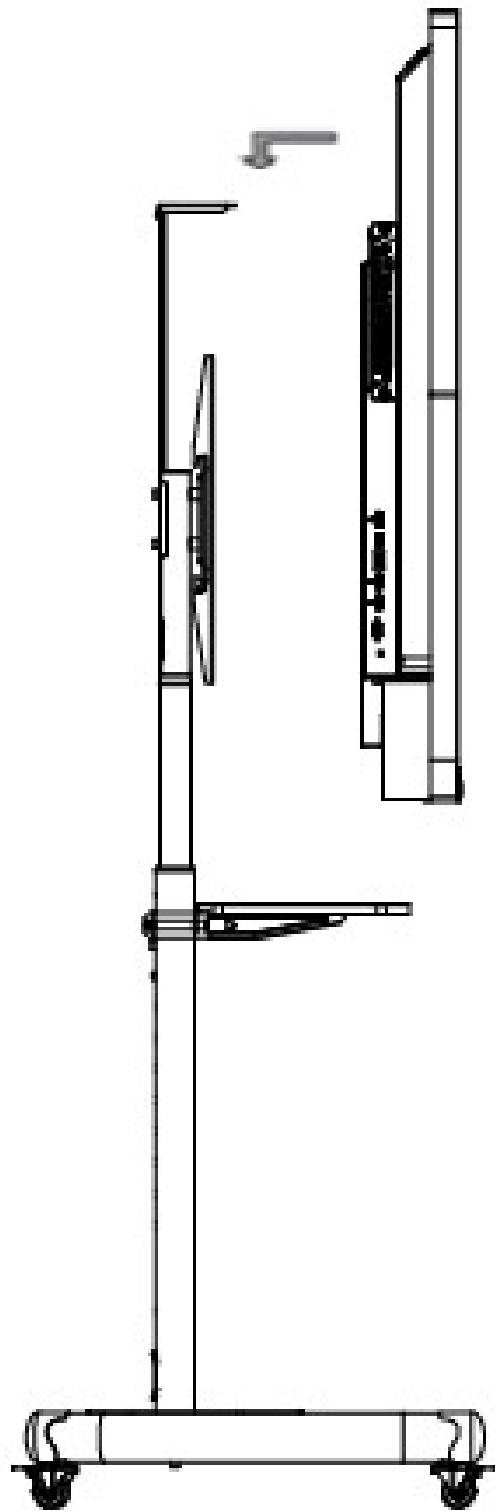

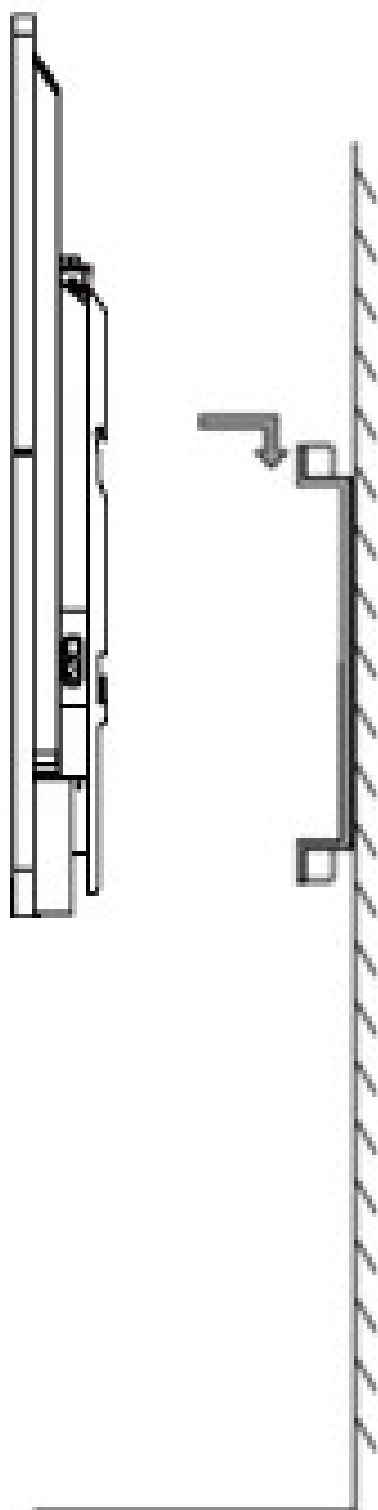

The rear should be installed on the hook holes

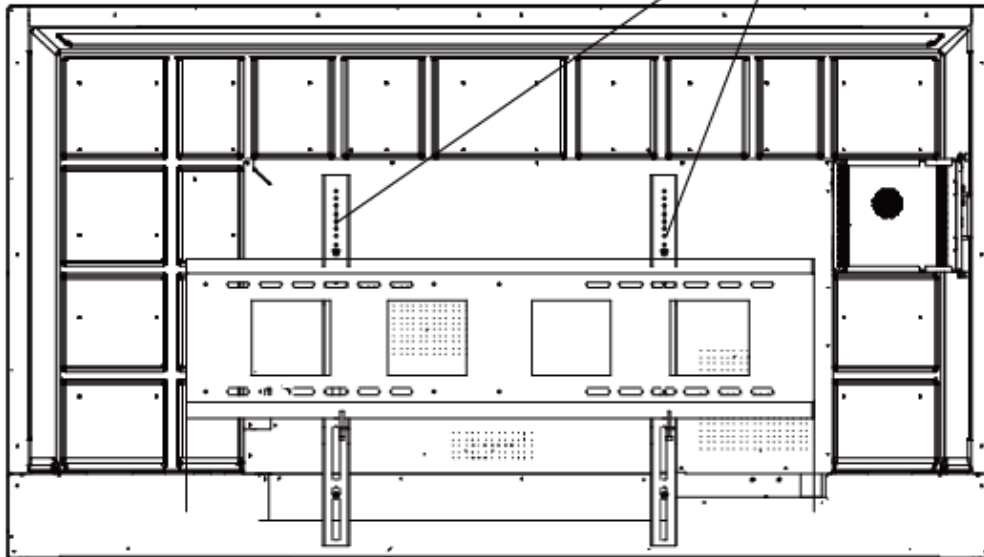

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com