

DS-KAW50-1

Power Supply for Door Station

MODEL

DS-KAW50-1




MAIN FEATURES

- Short circuit protection, over load protection, and over power voltage protection
- Mean Time Between Failure > 200,000 hrs
- Natural air cooling
- LED power indicator
- 100% full load aging
- 105°C long life electrolytic capacitor
- 5 seconds 300VAC surge voltage input tolerance
- Working Temperature: 70°C
- Passes 5G vibration test

Installation Dimension

L x W x D: 98 x 97 x 38 mm

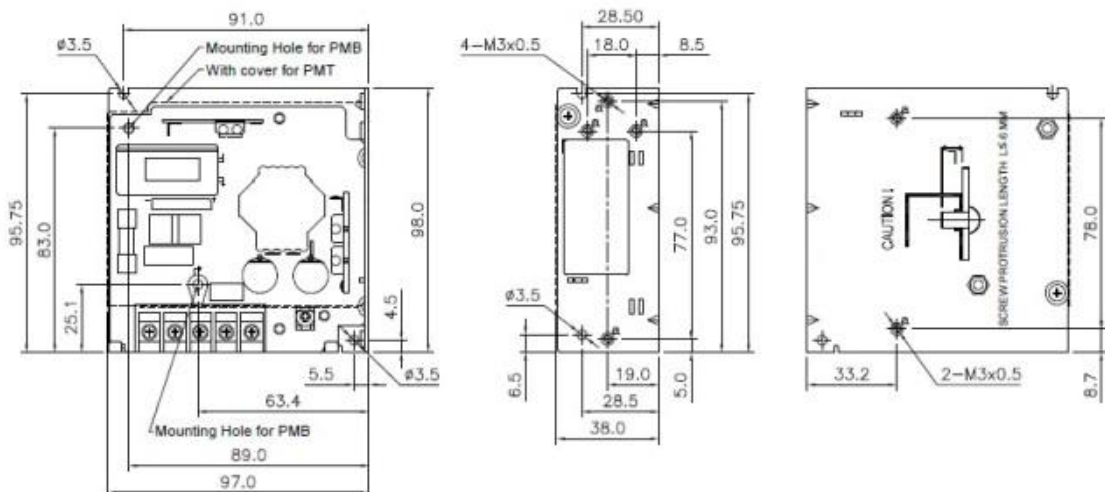

SPECIFICATION

| Model | DS-KAW50-1 |
|----------------------------|-------------------|
| Network Parameters | |
| Input Voltage | 100-240VAC |
| Output Voltage | 12VDC |
| Output Current | 4.17A |
| Output Power | 50W |
| Noise and Ripple | < 150mVpp |
| Voltage Adjustment Range | 11-14Vdc |
| General Information | |
| Work Temperature | -10°C~+70°C |
| Work Humidity | < 95% |
| Dimension | 98*97*38mm |
| Weight | 0.23kg |