



## Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

## DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



## Wide Viewing Angles (Up to 178° )



170° (H)/170° (V)

## DISPLAY CHARACTERISTICS

Mode Name	NEON-HD32-B
Screen Size	32"
Active Display Area (mm)	697.6845mm(W)×392.256mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	1.073G
Pixel Pitch(mm)	0.294(H)×0.294(V)
Brightness(nits)	350cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

## INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
Speaker	2x3W(Stereo)

## VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

## POWER&Mount Way

Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦35W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

## ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

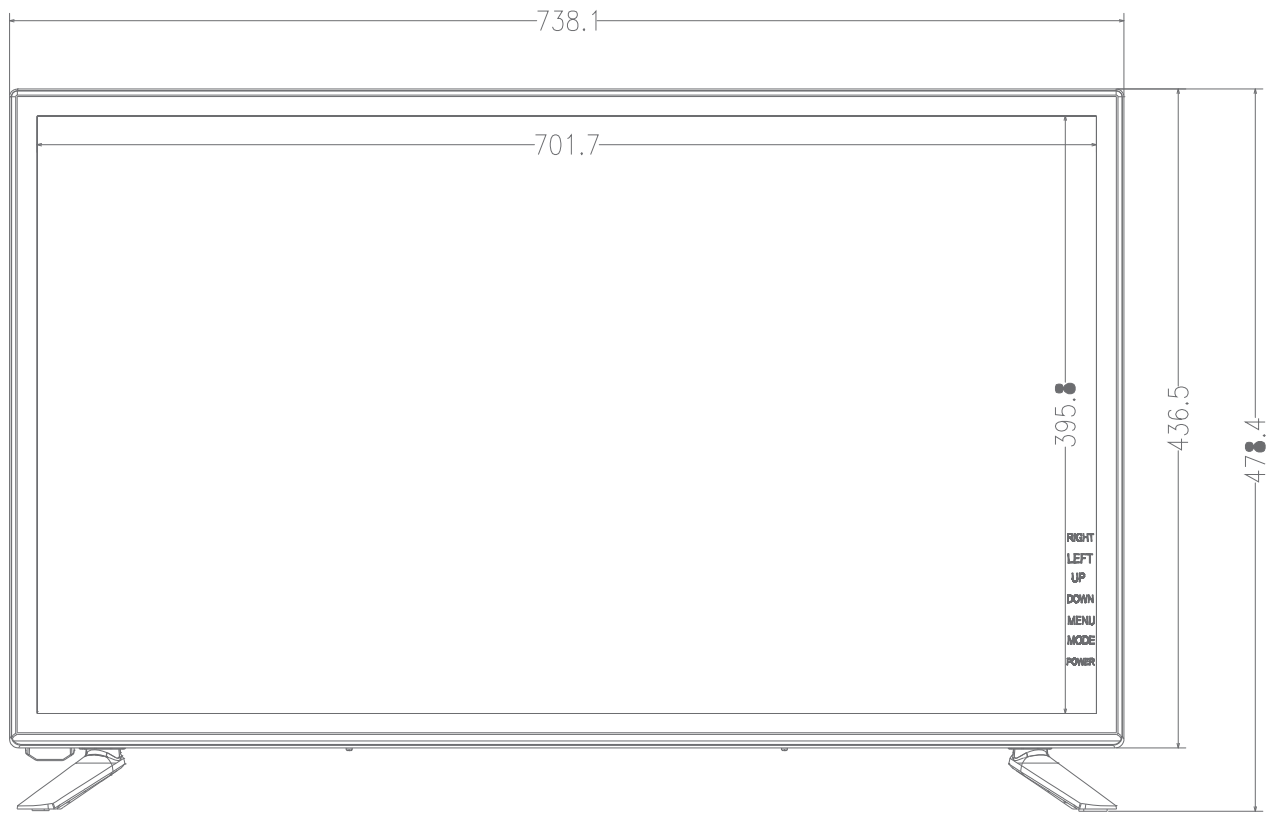

Unit:mm

