



NEON-LED17-POE

(17" HDMI/VGA/BNC Plastic Case PoE Monitor)



RJ45 PoE
Input



170/170
Viewing Angle



HDMI Digital
Input



BNC
In / Output



1280 × 1024



3-Years
Warranty

Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1280×1024.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 170° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



Wide Viewing Angles(Up to 170°)



170° (H)/170° (V)

DISPLAY CHARACTERISTICS

Mode Name	NEON-LED17-POE
Screen Size	17"
Active Display Area (mm)	337.920mm(W)×270.336mm(H)
Display Mode	4:3
LED Type	TFT-LED
Resolution	1280 × 1024
Display Color	16.7M
Pixel Pitch(mm)	0.264(H)×0.264(V)
Brightness(nits)	250cd/m²
Contrast Ratio	1000:1
Viewing Angle	170(H) /170(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
RJ 45 Input	1

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way

Power	DC12V ,50/60Hz or POE Input AT Standard
Working Temperature	-30 to +85 °C
Power Consumption	≦15W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/2.5kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

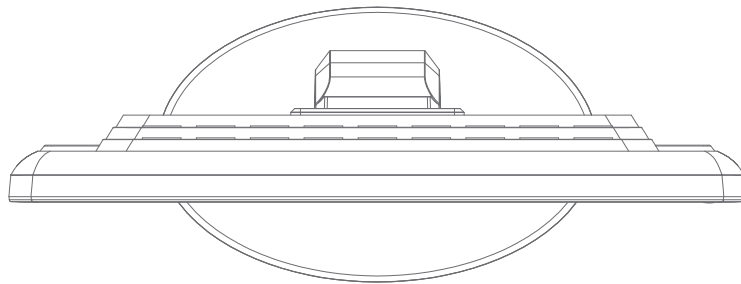

Technical drawing of the monitor stand and base assembly. The drawing shows a side view of the stand with the following dimensions:

- Top width: 45.30
- Top depth: 26.60
- Base width: 133.00
- Base depth: 75.00

