

HDMI SPLITTER

User Manual

HDMI 1x8 Splitter
(3D Ultra HD 4Kx2K)

Bring High-Definition to your life!

3D Ultra HD 4Kx2K HDMI 1X8 SPLITTER

Thank you for purchasing our product. To ensure safety and many years' trouble-free operation of the product, please read the manual carefully before using this product.

1.0 Introduction:

HDMI Splitter is a product which can distribute HDMI signal without loss to one or more high definition display device such as HDTV. It can optimize your home theatre system to the best effect.

HDMI signal is distributed from source device such as DVD, Satellite Receiver, Set-Top Box, DV Camera, A/V Receiver and other HDMI enabled device to high definition display device such as HDTV and HDMI Flat panel Display.

2.0 Features:

1. Fully HDMI 1.4 specification compliant. It is applicable to source device and high definition display device ,such as DVD and HDTV which have HDMI Ports or digital ports and are compliant with HDCP protocol.
2. Support high resolutions up to including 480i/p,576i/p,720i/p,1080i/p and 4Kx2K@25/30Hz
3. Support 30/36 dark, extended color space support, including:SYCC601 、 Adobe RGB 、 AdobeYCC601
4. Blu-ray DVD 24/50/60fs/HD-DVD/xvYCC.
5. Audio formats DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3 and DSD.
6. Extend the transmission distance and improve transmission signal.
7. Compatible with DVI by using HDMI to DVI adapter.
8. Plug- and -play.
9. Metal casing design and overall shielding without signal interference.
- 10.Led indicates signal and power mode.
- 11.Power supply (please refer to technical parameter).
- 12.Support 3D

3.0 Packaging accessories:

1. HDMI 1x8 Splitter-----1 Pcs
2. 5V DC Power Adaptor-----1 Pcs
3. User Manual-----1 Pcs

4.0 Technical parameters

HDMI Source Input Port-----	1
Display Device Output Port-----	8
Source Port Connector-----	19 PIN HDMI
Display Device Port Connector-----	19 PIN HDMI
HDCP Compliant-----	YES
Single Link Range-----	3840x2160
Input Video Signal-----	0.5-1.0 Volts P-P
Input DDC Signal-----	5 Volts P-P(TTL)
Deep Color-----	36 bit
HDMI Version-----	HDMI1.4
Bandwidth-----	Up to 340Mhz
Signal Speed-----	Up to 10.2Gbps
The length of input cable-----	PS4≤15M; BLUE DVD≤15M
The length of output cable-----	≤25M
The cable standard-----	26AWG HDMI1.4


3D Ultra HD 4Kx2K HDMI 1X8 SPLITTER

Vertical Frequency Range-----	60Hz
Power Consumption(max.)-----	6.5Watts
Operation Temperature-----	0°C-70°C
Working Voltage-----	DC 5V
Power Adaptor-----	5V 2A
Net Weight-----	0.98kg
Dimension: L*W*H(mm)-----	276x110x25

5.0 Panel Introduction




L1-L8-----HDMI Input Indicator
 Power-----Power Indicator
 Reset-----Reset button
 ON/OFF-----Power Switch

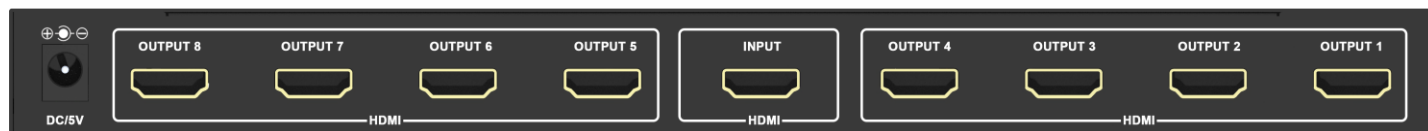

DC/5V-----Power Input port
 HDMI Output 8-1-----HDMI 1-8 outputs
 HDMI Input-----HDMI Input port

6.0 Connection diagram

Before installation, please make sure all devices you wish to connect have been turned off.

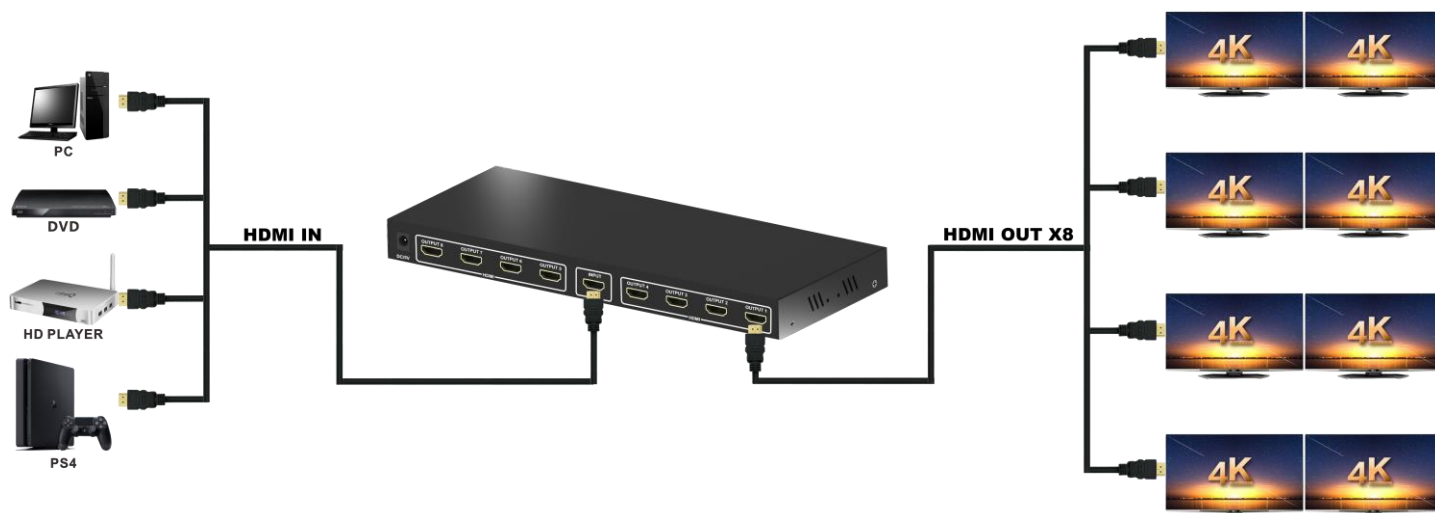

- 6.01 Connect the HDMI cable between signal source and input port of Splitter.
- 6.02 Connect the HDMI cable between output port of Splitter and HDTV.
- 6.03 Connect splitter and power adaptor.
- 6.04 Open the signal source and the power of HDTV, then it works.

Explanation: With different brands of the input or output device, the length of the connecting cables will differ too.

7.0 Installation and Precautions

To avoid electric shock , product damage and to protect your safety , please notice the following:

- 1.Please slowly plug or unplug signal cables and do not often plug , unplug , or shake them.
- 2.The equipment should not be placed under the sun , rain and damp or unventilated environment.
- 3.Liquid items should not be placed on the equipment.
- 4.Do not install the equipment near heat sources such as fire , power , or other amplifiers that produce heat.
- 5.Do not insert the metal or other objects to the equipment in addition to connecting cables to ports.
- 6.Do not demolish the equipment by yourself ; it should be maintained by professional maintenance staff.