


XTND 2K (60)

Product code: XTND2K60

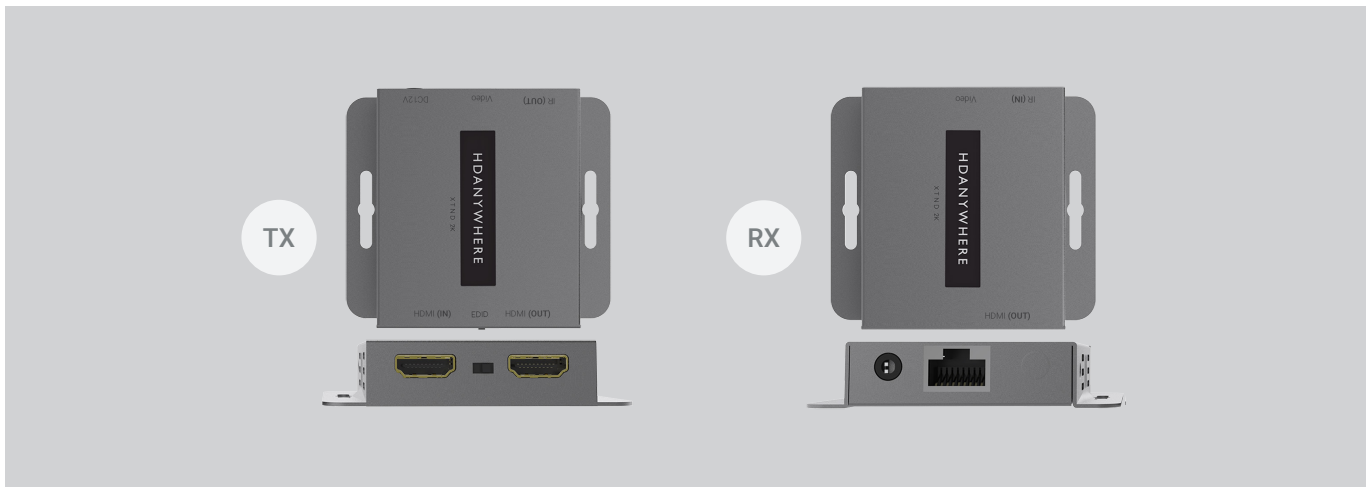

An ultra lightweight, palm-sized HDMI extender set supporting all resolutions up to Full HD 1080p 60Hz content uncompressed up to 60 metres over one twisted pair Cat cable. Control of the transmitter source is made possible via a return IR channel and included IR cabling.

The transmitter incorporates a HDMI loop/splitter out port for connecting a second display, or for daisy-chaining additional extenders in series. PoE power means the receiver is powered via the Cat cable.

Features


Supports Full HD 1080p* up to 60m
Supports LPCM 7.1ch, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master audio
HDMI loop port on TX
Return IR control channel (RX>TX)
Uncompressed HDMI TMDS signal transmission
Fix EDID settings
Sold as a complete install package, with all IR cabling and mounting kit included.
UK / EU / AU / US multi-territory adapters included

*Additional support for 4K (up to 4K@30Hz 4:4:4) is possible but source/display must be HDCP 1.4 compliant.

Specification

TX / RX form factor	Lightweight slender aluminium enclosure with integrated mounting wings
Inputs / outputs	TX HDMI in / HDMI out / RJ45 out / IR 3.5mm jack (out = from RX) RX RJ45 in / HDMI out / IR 3.5mm jack (in = to TX)
Transmission tech.	TMDS
Video bandwidth	10.2Gbps
ESD protection	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Device / Package weight	56 / 700 g
Dimensions (W/D/H)	78 / 67 / 16 mm (TX and RX)
Power	12V/1A DC type connector (US/EU standards, CE/FCC/UL certified)
Operating temperature	32°F to 104°F (0°C to 40°C)
Storage temperature	-4°F to 140°F (-20°C to 60°C)
Relative humidity	20~90 % RH (non-condensing)
Power consumption	2.73W (max)
Guarantee	2 year guarantee

Control









SKU

2.50.893

XTND2K60

Product Code: XTND2K60

LEGEND

-  Power
-  HDMI Cable
-  CAT6 Cable
-  IR Cable
-  IR Receiver
-  IR Signal

